

Scanvaegt pt9000 Process terminal

# Optimized production management



**ON-SITE ORDER  
INFORMATION AND  
EFFICIENT DATA  
PROCESSING**

Scanvaegt pt9000 is a powerful and flexible industrial computer for numerous jobs e.g. production control, order processing, despatch, data capture and monitoring.

## Powerful and versatile industrial computer

Scanvaegt's process terminal pt9000 is a powerful and flexible industrial computer with 17" touch screen and SSD harddisk.

The t9000 is supplied with Windows 7 Embedded Std. and can handle numerous jobs, e.g. production control, order processing, despatch, data capture and monitoring. With a strong processor, 4 Gb RAM, 120 Gb SSD harddisk and several input/output types, LAN, USB, RS232 as well as digital I/O, the pt9000 makes up an efficient and flexible process terminal.


The terminal is designed specifically for industrial use - it has an IP65-waterproof stainless steel cabinet and can withstand use in all industrial environments and thorough cleaning.

## Flexible and easy-to-use operations

The pt9000 has a userfriendly, functional design with a large touch screen for easy operation. An external keyboard can be connected to the terminal, it's placed on a separate shelf just below the pt9000. Tilt fittings for wall mounting is available.

## Highlights

- On-site order information and data registration
- Efficient data processing
- 17" touch screen
- Numerous connectivity options
- Sturdy industrial design

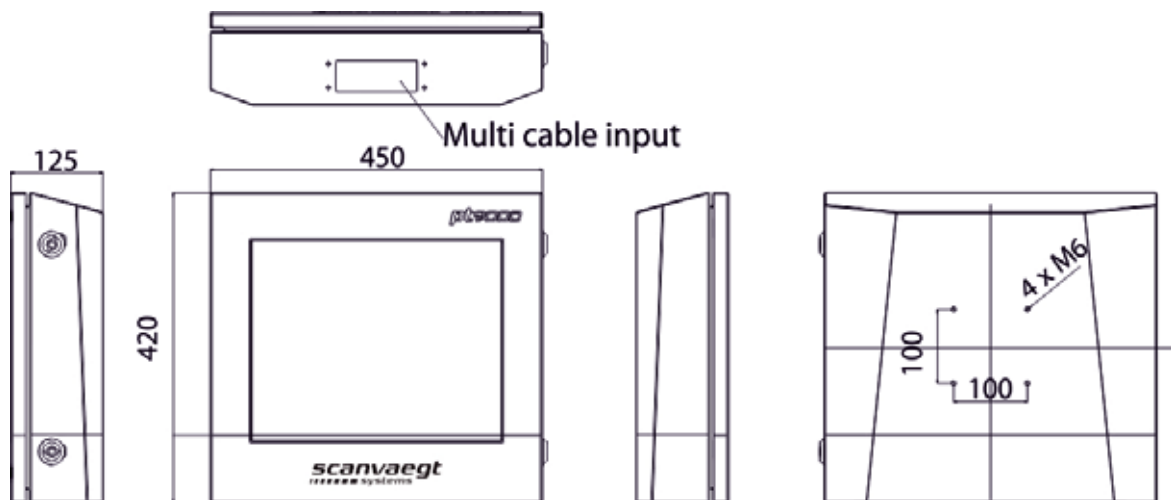

## Technical specifications

<b>System</b>	CPU	Intel Gen4 Celeron 2980U
	Memory	4 Gb DDR3-1600 SO-DIMM
	Chipset	N/A
	Graphics	Intel HD Graphics
<b>I/O</b>	LAN Chipset	2 x Intel i210-AT Gigabit Ethernet
	Seriell Port	4 x RS232 portar/easy connecting board
	USB Port	2 x USB 2.0 porte - 2 x USB 3.0 porte
	LAN	2 x RJ45 porte for GbE
	GPIO-port	4 digitale relay input og 4 digitale relay output
	Disp. Power supply	5 V/12 V/24 V
<b>Storage</b>	Type	120Gb SATA SSD ML disk

<b>Mechanical and Environment</b>	Cabinet	Stainless steel
	Dimensions	HxWxD: 420 x 450 x 125 mm
	Weight	18 kg
	Protection rating	IP65
	Operating Temp.	-20 ~ +30° C
	Storage Temp.	-40 ~ +65° C
<b>Display og Touch</b>	Display	17" TFT LCD-modul
	Resolutions	SXGA (1280 x 1024)
	Contrast	800:1 (læsbar i sollys)
	Touch	17" resistiv
<b>Power supply</b>	Voltage	100-240 VAC, 50/60 hz
	Consumption	72 Watt